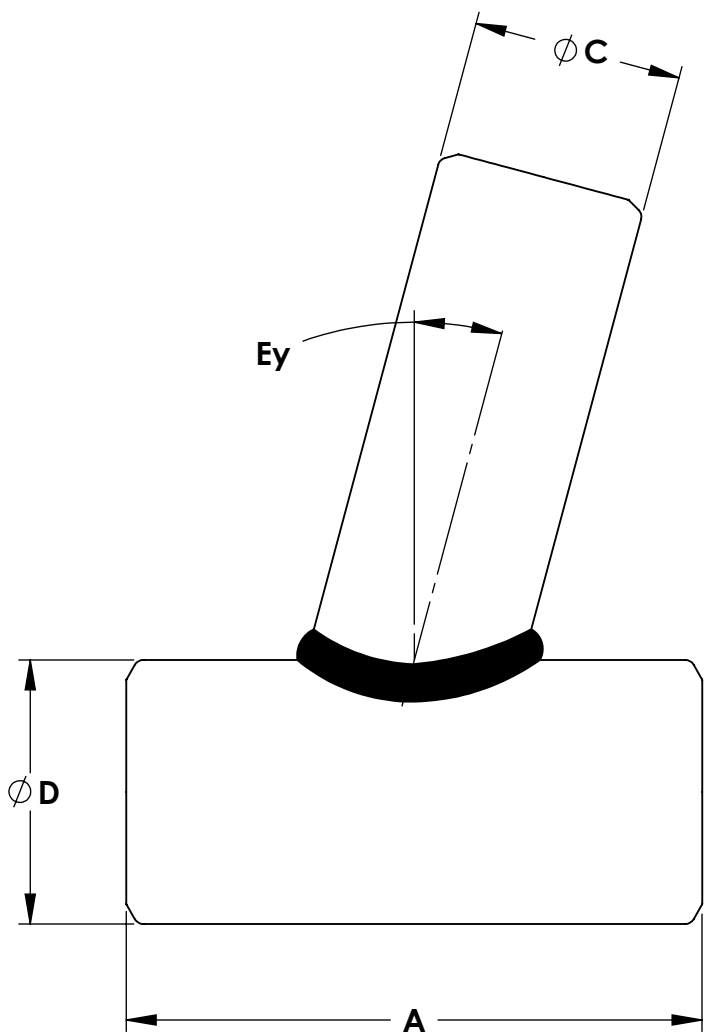


TABLE: AVAILABLE OPTIONS

PART NUMBER:	TAB (NPS)	ØC	MAIN RUN (NPS)	ØD	EY	A ±.06
PLK1550D1616E1	1	2.000	1	2.000	0°	8.50
PLK1550D1616E2	1	2.000	1	2.000	15°	8.50
PLK1550D1616E3	1	2.000	1	2.000	30°	8.50
PLK1550D1616E4	1	2.000	1	2.000	45°	10.00
PLK1550D1624E1	1	2.000	1 1/2	2.500	0°	8.50
PLK1550D1624E2	1	2.000	1 1/2	2.500	15°	8.50
PLK1550D1624E3	1	2.000	1 1/2	2.500	30°	8.50
PLK1550D1624E4	1	2.000	1 1/2	2.500	45°	10.00
PLK1550D1632E1	1	2.000	2	3.000	0°	8.50
PLK1550D1632E2	1	2.000	2	3.000	15°	8.50
PLK1550D1632E3	1	2.000	2	3.000	30°	8.50
PLK1550D1632E4	1	2.000	2	3.000	45°	10.00
PLK1550D1640E1	1	2.000	2 1/2	3.750	0°	8.50
PLK1550D1640E2	1	2.000	2 1/2	3.750	15°	8.50
PLK1550D1640E3	1	2.000	2 1/2	3.750	30°	8.50
PLK1550D1640E4	1	2.000	2 1/2	3.750	45°	10.00
PLK1550D1648E1	1	2.000	3	4.375	0°	8.50
PLK1550D1648E2	1	2.000	3	4.375	15°	8.50
PLK1550D1648E3	1	2.000	3	4.375	30°	8.50
PLK1550D1648E4	1	2.000	3	4.375	45°	12.00
PLK1550D1656E1	1	2.000	3 1/2	5.000	0°	8.50
PLK1550D1656E2	1	2.000	3 1/2	5.000	15°	8.50
PLK1550D1656E3	1	2.000	3 1/2	5.000	30°	8.50
PLK1550D1656E4	1	2.000	3 1/2	5.000	45°	12.00
PLK1550D1664E1	1	2.000	4	5.500	0°	8.50
PLK1550D1664E2	1	2.000	4	5.500	15°	8.50
PLK1550D1664E3	1	2.000	4	5.500	30°	8.50
PLK1550D1664E4	1	2.000	4	5.500	45°	12.00
PLK1550D1680E1	1	2.000	5	6.500	0°	14.50
PLK1550D1680E2	1	2.000	5	6.500	15°	14.50
PLK1550D1680E3	1	2.000	5	6.500	30°	14.50
PLK1550D1680E4	1	2.000	5	6.500	45°	17.00
PLK1550D2424E1	1 1/2	2.500	1 1/2	2.500	0°	8.50
PLK1550D2424E2	1 1/2	2.500	1 1/2	2.500	15°	8.50
PLK1550D2424E3	1 1/2	2.500	1 1/2	2.500	30°	10.00
PLK1550D2424E4	1 1/2	2.500	1 1/2	2.500	45°	10.50
PLK1550D2432E1	1 1/2	2.500	2	3.000	0°	8.50
PLK1550D2432E2	1 1/2	2.500	2	3.000	15°	8.50
PLK1550D2432E3	1 1/2	2.500	2	3.000	30°	10.00
PLK1550D2432E4	1 1/2	2.500	2	3.000	45°	11.00
PLK1550D2440E1	1 1/2	2.500	2 1/2	3.750	0°	8.50
PLK1550D2440E2	1 1/2	2.500	2 1/2	3.750	15°	8.50
PLK1550D2440E3	1 1/2	2.500	2 1/2	3.750	30°	10.00
PLK1550D2440E4	1 1/2	2.500	2 1/2	3.750	45°	12.00
PLK1550D2448E1	1 1/2	2.500	3	4.375	0°	8.50
PLK1550D2448E2	1 1/2	2.500	3	4.375	15°	8.50
PLK1550D2448E3	1 1/2	2.500	3	4.375	30°	12.00
PLK1550D2448E4	1 1/2	2.500	3	4.375	45°	12.00

PLK1550D2456E1	1 1/2	2.500	3 1/2	5.000	0°	8.50
PLK1550D2456E2	1 1/2	2.500	3 1/2	5.000	15°	8.50
PLK1550D2456E3	1 1/2	2.500	3 1/2	5.000	30°	12.00
PLK1550D2456E4	1 1/2	2.500	3 1/2	5.000	45°	12.00
PLK1550D2464E1	1 1/2	2.500	4	5.500	0°	8.50
PLK1550D2464E2	1 1/2	2.500	4	5.500	15°	8.50
PLK1550D2464E3	1 1/2	2.500	4	5.500	30°	8.50
PLK1550D2464E4	1 1/2	2.500	4	5.500	45°	12.00
PLK1550D2480E1	1 1/2	2.500	5	6.500	0°	14.50
PLK1550D2480E2	1 1/2	2.500	5	6.500	15°	14.50
PLK1550D2480E3	1 1/2	2.500	5	6.500	30°	14.50
PLK1550D2480E4	1 1/2	2.500	5	6.500	45°	17.00

TABLE: AVAILABLE OPTIONS

PART NUMBER:	TAB (NPS)	ØC	MAIN RUN (NPS)	ØD	EY	A
PLK1550D3224E1	2	3.000	1 1/2	2.500	0°	8.500
PLK1550D3232E1	2	3.000	2	3.000	0°	8.500
PLK1550D3232E2	2	3.000	2	3.000	15°	8.500
PLK1550D3232E3	2	3.000	2	3.000	30°	10.000
PLK1550D3232E4	2	3.000	2	3.000	45°	11.000
PLK1550D3240E1	2	3.000	2 1/2	3.750	0°	8.500
PLK1550D3240E2	2	3.000	2 1/2	3.750	15°	8.500
PLK1550D3240E3	2	3.000	2 1/2	3.750	30°	10.000
PLK1550D3240E4	2	3.000	2 1/2	3.750	45°	12.000
PLK1550D3248E1	2	3.000	3	4.375	0°	8.500
PLK1550D3248E2	2	3.000	3	4.375	15°	8.500
PLK1550D3248E3	2	3.000	3	4.375	30°	12.000
PLK1550D3248E4	2	3.000	3	4.375	45°	12.500
PLK1550D3256E1	2	3.000	3 1/2	5.000	0°	8.500
PLK1550D3256E2	2	3.000	3 1/2	5.000	15°	8.500
PLK1550D3256E3	2	3.000	3 1/2	5.000	30°	12.000
PLK1550D3256E4	2	3.000	3 1/2	5.000	45°	13.600
PLK1550D3264E1	2	3.000	4	5.500	0°	8.500
PLK1550D3264E10	2	3.000	4	5.500	10°	8.500
PLK1550D3264E2	2	3.000	4	5.500	15°	8.500
PLK1550D3264E3	2	3.000	4	5.500	30°	12.000
PLK1550D3264E4	2	3.000	4	5.500	45°	14.000
PLK1550D3280E1	2	3.000	5	6.500	0°	14.500
PLK1550D3280E2	2	3.000	5	6.500	15°	14.500
PLK1550D3280E3	2	3.000	5	6.500	30°	17.000
PLK1550D3280E4	2	3.000	5	6.500	45°	22.250
PLK1550D4040E1	2 1/2	3.750	2 1/2	3.750	0°	10.000
PLK1550D4040E2	2 1/2	3.750	2 1/2	3.750	15°	10.000
PLK1550D4040E3	2 1/2	3.750	2 1/2	3.750	30°	12.000
PLK1550D4040E4	2 1/2	3.750	2 1/2	3.750	45°	12.000
PLK1550D4048E1	2 1/2	3.750	3	4.375	0°	12.000
PLK1550D4048E2	2 1/2	3.750	3	4.375	15°	12.000
PLK1550D4048E3	2 1/2	3.750	3	4.375	30°	12.000
PLK1550D4048E4	2 1/2	3.750	3	4.375	45°	12.500
PLK1550D4056E1	2 1/2	3.750	3 1/2	5.000	0°	12.000
PLK1550D4056E2	2 1/2	3.750	3 1/2	5.000	15°	12.000
PLK1550D4056E3	2 1/2	3.750	3 1/2	5.000	30°	12.000
PLK1550D4056E4	2 1/2	3.750	3 1/2	5.000	45°	13.600
PLK1550D4064E1	2 1/2	3.750	4	5.500	0°	9.250
PLK1550D4064E2	2 1/2	3.750	4	5.500	15°	12.000
PLK1550D4064E3	2 1/2	3.750	4	5.500	30°	12.000
PLK1550D4064E4	2 1/2	3.750	4	5.500	45°	14.000
PLK1550D4064E20	2 1/2	3.750	4	5.500	20°	12.000
PLK1550D4080E1	2 1/2	3.750	5	6.500	0°	14.500
PLK1550D4080E2	2 1/2	3.750	5	6.500	15°	17.000
PLK1550D4080E3	2 1/2	3.750	5	6.500	30°	17.000
PLK1550D4080E4	2 1/2	3.750	5	6.500	45°	22.500

PLK1550D4848E1	3	4.375	3	4.375	0°	12.000
PLK1550D4848E10	3	4.375	3	4.375	10°	12.500
PLK1550D4848E2	3	4.375	3	4.375	15°	12.000
PLK1550D4848E3	3	4.375	3	4.375	30°	12.500
PLK1550D4848E4	3	4.375	3	4.375	45°	12.500
PLK1550D4856E1	3	4.375	3 1/2	5.000	0°	12.000
PLK1550D4856E2	3	4.375	3 1/2	5.000	15°	12.000
PLK1550D4856E3	3	4.375	3 1/2	5.000	30°	13.600
PLK1550D4856E4	3	4.375	3 1/2	5.000	45°	13.600
PLK1550D4864E1	3	4.375	4	5.500	0°	12.000
PLK1550D4864E2	3	4.375	4	5.500	15°	12.000
PLK1550D4864E3	3	4.375	4	5.500	30°	14.000
PLK1550D4864E4	3	4.375	4	5.500	45°	14.000
PLK1550D4880E1	3	4.375	5	6.500	0°	17.000
PLK1550D4880E2	3	4.375	5	6.500	15°	17.000
PLK1550D4880E3	3	4.375	5	6.500	30°	22.250
PLK1550D4880E4	3	4.375	5	6.500	45°	22.250

--	--	--	--	--	--	--

TABLE: AVAILABLE OPTIONS

PART NUMBER:	TAB (NPS)	ØC	MAIN RUN (NPS)	ØD	EY	A
PLK1550D4896E1	3	4.375	6	8.000	0°	19.000
PLK1550D4896E2	3	4.375	6	8.000	15°	19.000
PLK1550D4896E3	3	4.375	6	8.000	30°	19.000
PLK1550D4896E4	3	4.375	6	8.000	45°	22.000
PLK1550D5656E1	3 1/2	5.000	3 1/2	5.000	0°	12.000
PLK1550D5656E2	3 1/2	5.000	3 1/2	5.000	15°	12.000
PLK1550D5656E3	3 1/2	5.000	3 1/2	5.000	30°	13.600
PLK1550D5656E4	3 1/2	5.000	3 1/2	5.000	45°	13.600
PLK1550D5664E1	3 1/2	5.000	4	5.500	0°	12.000
PLK1550D5664E2	3 1/2	5.000	4	5.500	15°	12.000
PLK1550D5664E3	3 1/2	5.000	4	5.500	30°	14.000
PLK1550D5664E4	3 1/2	5.000	4	5.500	45°	14.000
PLK1550D5680E1	3 1/2	5.000	5	6.500	0°	17.000
PLK1550D5680E2	3 1/2	5.000	5	6.500	15°	17.000
PLK1550D5680E3	3 1/2	5.000	5	6.500	30°	22.250
PLK1550D5680E4	3 1/2	5.000	5	6.500	45°	22.250
PLK1550D5696E1	3 1/2	5.000	6	8.000	0°	19.000
PLK1550D5696E2	3 1/2	5.000	6	8.000	15°	19.000
PLK1550D5696E3	3 1/2	5.000	6	8.000	30°	22.000
PLK1550D5696E4	3 1/2	5.000	6	8.000	45°	26.500
PLK1550D6464E1	4	5.500	4	5.500	0°	12.000
PLK1550D6464E2	4	5.500	4	5.500	15°	12.000
PLK1550D6464E3	4	5.500	4	5.500	30°	14.000
PLK1550D6464E4	4	5.500	4	5.500	45°	14.000
PLK1550D6480E1	4	5.500	5	6.500	0°	17.000
PLK1550D6480E10	4	5.500	5	6.500	10°	17.000
PLK1550D6480E2	4	5.500	5	6.500	15°	17.000
PLK1550D6480E3	4	5.500	5	6.500	30°	22.250
PLK1550D6480E4	4	5.500	5	6.500	45°	22.250
PLK1550D6496E1	4	5.500	6	8.000	0°	19.000
PLK1550D6496E2	4	5.500	6	8.000	15°	19.000
PLK1550D6496E3	4	5.500	6	8.000	30°	22.000
PLK1550D6496E4	4	5.500	6	8.000	45°	26.500
PLK1550D8080E1	5	6.500	5	6.500	0°	17.000
PLK1550D8080E2	5	6.500	5	6.500	15°	22.250
PLK1550D8080E3	5	6.500	5	6.500	30°	22.250
PLK1550D8080E4	5	6.500	5	6.500	45°	22.250
PLK1550D8096E1	5	6.500	6	8.000	0°	22.000
PLK1550D8096E2	5	6.500	6	8.000	15°	22.000
PLK1550D8096E3	5	6.500	6	8.000	30°	22.000
PLK1550D8096E4	5	6.500	6	8.000	45°	26.500
PLK1550D9696E1	6	8.000	6	8.000	0°	22.000
PLK1550D9696E2	6	8.000	6	8.000	15°	22.000
PLK1550D9696E3	6	8.000	6	8.000	30°	26.500
PLK1550D9696E4	6	8.000	6	8.000	45°	26.500

LEGEND:

