


TABLE 1: AVAILABLE OPTIONS

ASSEMBLY PART NUMBER	SIZE CODE	BUS (NPS)	(A)	(ØC)	(D)	(F)	L	(M)	n	(T)	(W)	X
PLK2940D16A	16	1	3.00	2.000	5.50	0.192	13.07	0.625	6	0.375	3.00	0
PLK2940D16B	16	1	3.00	2.000	5.50	0.192	13.07	1.125	6	0.375	4.00	0
PLK2940D24A	24	1 1/2	3.00	2.500	5.50	0.288	13.29	0.625	9	0.500	3.00	0
PLK2940D24B	24	1 1/2	3.00	2.500	5.50	0.288	13.29	1.125	9	0.500	4.00	0
PLK2940D32A	32	2	3.50	3.000	5.50	0.416	13.92	0.625	13	0.500	3.00	0
PLK2940D32B	32	2	3.50	3.000	5.50	0.416	13.92	1.125	13	0.500	4.00	0
PLK2940D40A	40	2 1/2	3.50	3.750	5.50	0.320	13.95	0.625	10	0.625	3.00	0
PLK2940D40B	40	2 1/2	3.50	3.750	5.50	0.320	13.95	1.125	10	0.625	4.00	0
PLK2940D48A	48	3	4.00	4.375	5.50	0.416	14.67	0.625	13	0.750	3.00	0
PLK2940D48B	48	3	4.00	4.375	5.50	0.416	14.67	1.125	13	0.750	4.00	0
PLK2940D56A	56	3 1/2	4.00	5.000	5.50	0.512	14.76	0.625	16	0.750	3.00	0
PLK2940D56B	56	3 1/2	4.00	5.000	5.50	0.512	14.76	1.125	16	0.750	4.00	0
PLK2940D64A	64	4	4.00	5.500	5.50	0.608	14.86	0.625	19	0.750	3.00	0
PLK2940D64B	64	4	4.00	5.500	5.50	0.608	14.86	1.125	19	0.750	4.00	0
PLK2940D64B-5	64	4	4.00	5.500	10.50	0.608	14.86	1.125	19	0.750	4.00	5.00
PLK2940D80A	80	5	8.69	6.500	5.50	0.832	20.02	0.625	26	1.000	3.00	0
PLK2940D80B	80	5	8.69	6.500	5.50	0.832	20.02	1.125	26	1.000	4.00	0

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF DMC POWER AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT EXPRESS AUTHORIZATION BY DMC POWER.

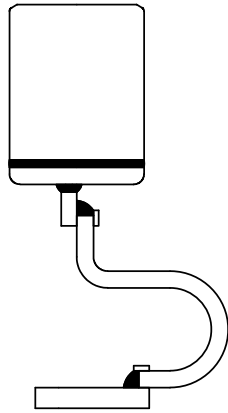

SIZE 80 ONLY USES A WELDED
CAP AND HALF SPLICE IN PLACE
OF ONE PIECE BODY

LEGEND:

PLK2940 D XX X - X

- (OPTIONAL) DISTANCE BETWEEN BUS CENTERLINE AND BOLT HOLE CENTERLINE
- PAD WIDTH OPTION:
A=3", B=4"
- BUS SIZE IDENTIFIER
- MATERIAL CODE:
"D" = ALUMINUM
- BASIC PART NUMBER

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF DMC POWER AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT EXPRESS AUTHORIZATION BY DMC POWER.