



VERTICAL EYE
STANDARD


FIGURE 1

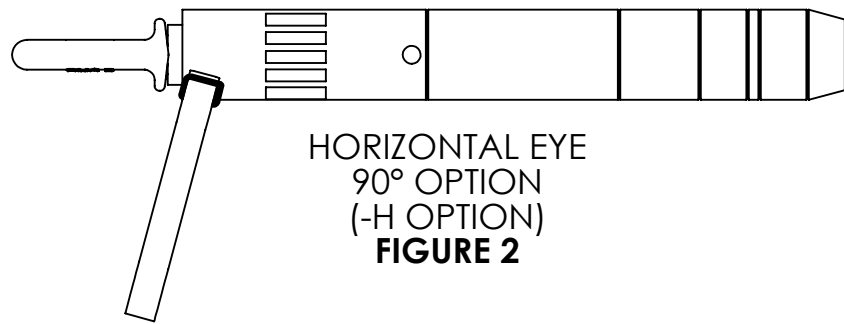


HORIZONTAL EYE
90° OPTION
(-H OPTION)
FIGURE 2




COLLET (5)




JUMPER TERMINAL (6)




BOLT PACKAGE (7)



PLUG (8)

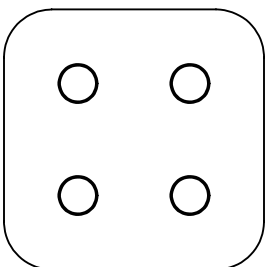

BOLT SHIELD FOR
EHV DEAD ENDS ONLY (9)



COLLET STOP (10)


THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF DMCPower AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT EXPRESS AUTHORIZATION BY DMCPower.

TABLE: AVAILABLE OPTIONS AND ASSEMBLY INFORMATION

ASSEMBLY PART NUMBER	CODE WORD	CABLE CODE	CABLE SIZE (kcmil)	STRANDING AL/ST	STLCABLE OD	COMPLETE CABLE OD	ØF	L	T	ØC	W	BOLT HOLES	SWAGE DIE	COLOR CODE	POWER UNIT
DC99-150-02	Merlin	02	336.4	18/1	.137	.684	1.50	13.40	.625	.44	2.00	2	150	WHITE	DLT47
DC99-150-02-H	Merlin	02	336.4	18/1	.137	.684	1.50	13.40	.625	.44	2.00	2	150	WHITE	DLT47
DC99-150-04	Linnet	04	336.4	26/7	.265	.720	1.50	13.40	.625	.44	2.00	2	150	WHITE	DLT47
DC99-150-10	Brant Ibis	10	397.5	24/7 26/7	.257 .289	.772 .783	1.50	13.80	.625	.44	2.00	2	150	WHITE	DLT47
DC99-150-10-HE3	Brant Ibis	10	397.5	24/7 26/7	.257 .289	.772 .783	1.50	13.80	.625	.44	4.00	4	150	WHITE	DLT47
DC99-150-16	Hawk	16	477.0	26/7	.316	.858	1.50	13.80	.625	.44	2.00	2	150	WHITE	DLT47
DC99-175-22	Dove	22	556.5	26/7	.341	.927	1.75	17.65	.625	.62	2.00	2	175	GRAY	DLT47
DC99-188-39	Cuckoo	39	795.0	24/7	.364	1.092	1.88	18.65	.625	.62	3.00	4	188	BLUE	DLT47
DC99-188-40	Drake	40	795.0	26/7	.408	1.107	1.88	18.65	.625	.62	3.00	4	188	BLUE	DLT47
DC99-188-40-NT	Drake	40	795.0	26/7	.408	1.107	1.88	18.65	.625	.62	3.00	4	188	BLUE	DLT47
DC99-188-44	Tern	44	795.0	45/7	.266	1.063	1.88	18.65	.625	.62	3.00	4	188	BLUE	DLT47
DC99-200-50-EHV	Rail	50	954.0	45/7	.291	1.165	2.00	21.70	.750	.78	4.00	4	200	GREEN	DLT58
DC99-200-52	Canary Cardinal	52	900 954	54/7	.387 .399	1.162 1.196	2.00	21.70	.750	.78	3.00	4	200	GREEN	DLT58
DC99-200-52-EHV	Canary Cardinal	52	900 954	54/7	.387 .399	1.162 1.196	2.00	21.70	.750	.78	4.00	4	200	GREEN	DLT58
DC99-200-54	Ortolan	54	1033.5	45/7	.303	1.212	2.00	21.70	.750	.78	3.00	4	200	GREEN	DLT58
DC99-200-54-NT	Ortolan	54	1033.5	45/7	.303	1.212	2.00	21.70	.750	.78	3.00	4	200	GREEN	DLT58
DC99-200-54-NTH	Ortolan	54	1033.5	45/7	.303	1.212	2.00	21.70	.750	.78	3.00	4	200	GREEN	DLT58
DC99-200-56	Curlew	56	1033.5	54/7	.415	1.245	2.00	21.70	.750	.78	3.00	4	200	GREEN	DLT58
DC99-225-58	Bluejay	58	1113.0	45/7	.315	1.258	2.25	21.45	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-66	Bittern	66	1272.0	45/7	.336	1.345	2.25	22.45	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-66-H	Bittern	66	1272.0	45/7	.336	1.345	2.25	22.45	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-66-45	Bittern	66	1272.0	45/7	.336	1.345	2.25	22.45	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-68	Pheasant	68	1272.0	54/19	.461	1.381	2.25	22.45	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-76	Lapwing	76	1590.0	45/7	.376	1.504	2.25	25.95	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-225-76-NT	Lapwing	76	1590.0	45/7	.376	1.504	2.25	25.95	.750	.78	3.00	4	225	YELLOW	DLT85
DC99-275-78	Falcon	78	1590.0	54/19	.515	1.544	2.75	28.05	1.000	1.00	4.00	4	275	RED	DLT85
DC99-275-82	Bluebird	82	2156.0	84/19	.481	1.762	2.75	28.05	1.000	1.00	4.00	4	275	RED	DLT85

EXAMPLE OF IDENTIFICATION:

DC 99 - XXX - XX - XX X XX XX XXX

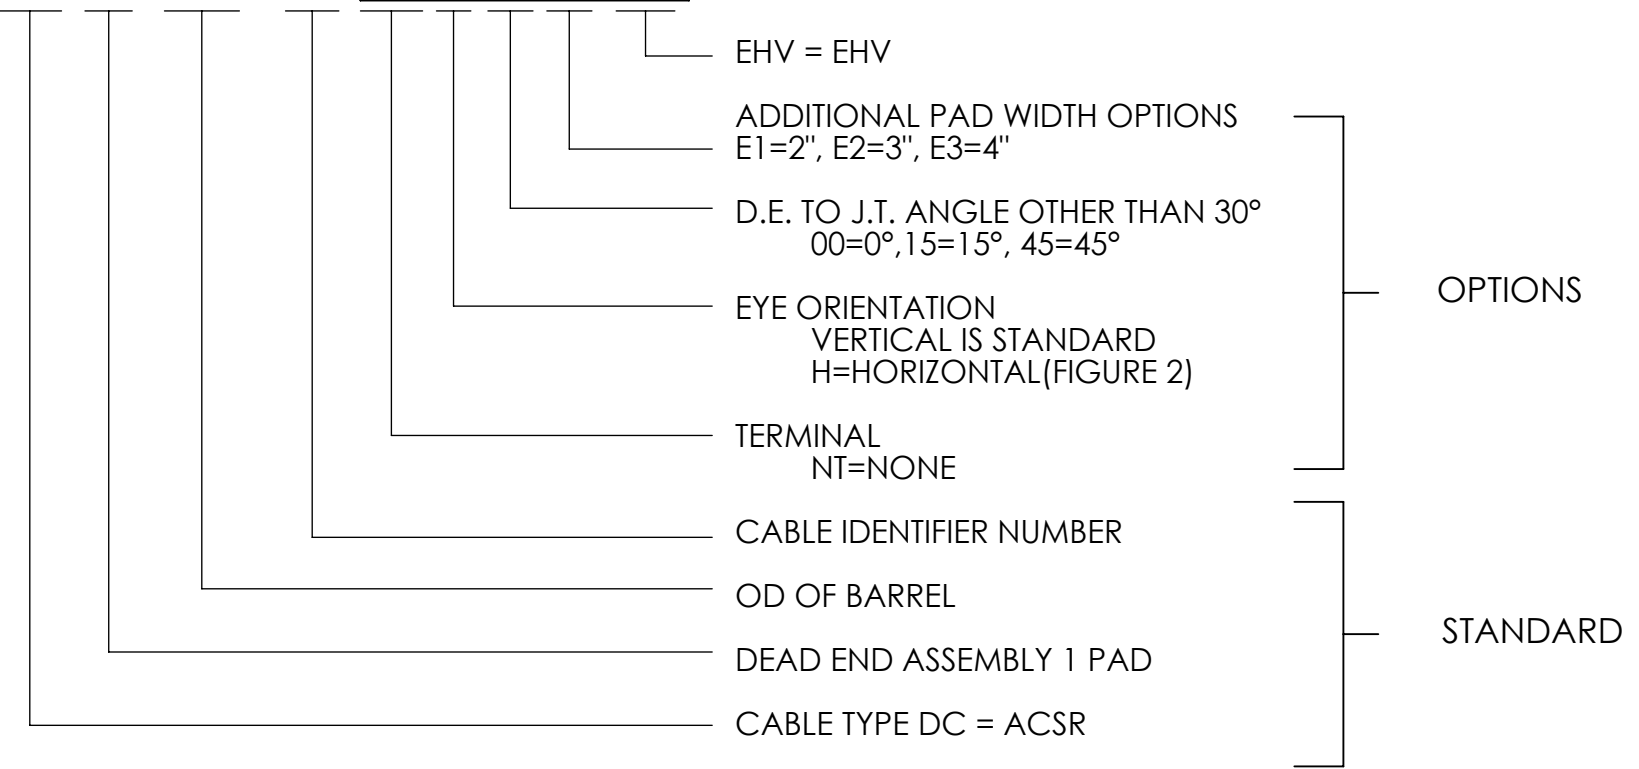

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF DMCPOWER AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT EXPRESS AUTHORIZATION BY DMCPOWER.